



LED Panel Light

New energy-saving LED lights



Areas of Application

- Office building, School, Hospital
- Kitchen, Hotel, Corridor, Elevator

Features & Benefits


1. Provide flicker-free light for optimal visual comfort
2. Ceiling LED luminaires with aluminium frame in high value design.
3. Excellent performance for task and general lighting.
4. Low maintenance and operation costs due to high lifespan of LED.
5. Dust protection according to IP20
6. Improved thermal management to withstand ambient temperatures up to 45 °C.
7. Suitable to be suspended with steel-wire, ceiling-mounting.
8. Meets all Australia and New Zealand safety and EMC requirements.

Specifications


Product Description	Wattage	Input Voltage	Current	Frequency	Power Factor	Luminaire Flux	Luminaire Efficacy	Light Color	Color Temp.	CRI
GPR-PNL-LED-60636	36W	220-240V AC	17 mA	50-60 Hz	0.95	3400lm	96 lm/W	Neutral White	4000K	>80
GPR-PNL-LED-60640	40W	220-240V AC	19 mA	50-60 Hz	0.95	3800lm	96 lm/W	Neutral White	4000K	>80
GPR-PNL-LED-62636	36W	220-240V AC	17 mA	50-60 Hz	0.95	3400lm	96 lm/W	Neutral White	4000K	>80
GPR-PNL-LED-62640	40W	220-240V AC	19 mA	50-60 Hz	0.95	3800lm	96 lm/W	Neutral White	4000K	>80
GPR-PNL-LED-12336	36W	220-240V AC	17 mA	50-60 Hz	0.95	3400lm	96 lm/W	Neutral White	4000K	>80
GPR-PNL-LED-12340	40W	220-240V AC	19 mA	50-60 Hz	0.95	3800lm	96 lm/W	Neutral White	4000K	>80

Product Description	Operating Temperature	Beam Angle	Lifespan	Number of Switching Cycles	Dimmable	Type of Protection	Body Material	Cover Material	Product Color	Weight (Include driver=0.2KG)	Type of Installation
GPR-PNL-LED-60636	-20...+45 °C	113°	55,000 h	15,000x	No	IP20	Aluminum	PC	Aluminum	3.7KG	Ceiling-Mount, steel-wire suspensions
GPR-PNL-LED-60640	-20...+45 °C	113°	55,000 h	15,000x	No	IP20	Aluminum	PC	Aluminum	3.7KG	
GPR-PNL-LED-62636	-20...+45 °C	113°	55,000 h	15,000x	No	IP20	Aluminum	PC	Aluminum	3.9KG	
GPR-PNL-LED-62640	-20...+45 °C	113°	55,000 h	15,000x	No	IP20	Aluminum	PC	Aluminum	3.9KG	
GPR-PNL-LED-12336	-20...+45 °C	113°	55,000 h	15,000x	No	IP20	Aluminum	PC	Aluminum	3.7KG	
GPR-PNL-LED-12340	-20...+45 °C	113°	55,000 h	15,000x	No	IP20	Aluminum	PC	Aluminum	3.7KG	


Dimensional drawing

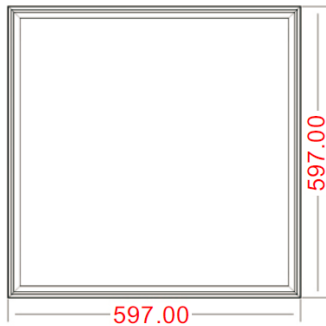

GPR-PNL-LED-60636
GPR-PNL-LED-60640

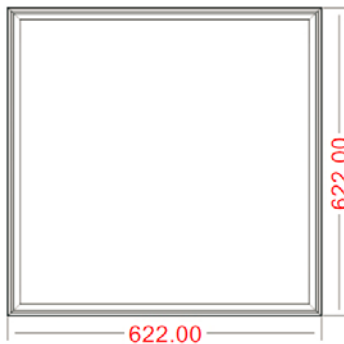

GPR-PNL-LED-62636
GPR-PNL-LED-62640

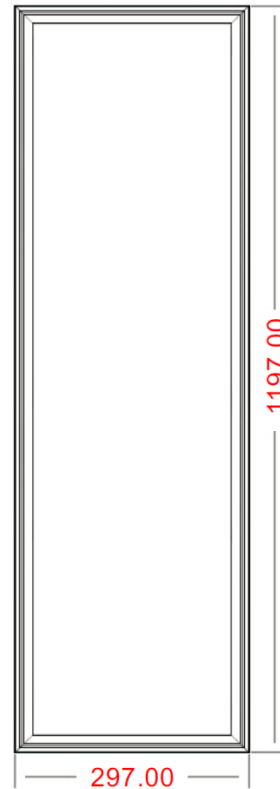

GPR-PNL-LED-12336
GPR-PNL-LED-12340

Product Description	Length	Width	Thickness
GPR-PNL-LED-60636	597mm	597mm	11.5mm
GPR-PNL-LED-60640	597mm	597mm	11.5mm
GPR-PNL-LED-62636	622mm	622mm	11.5mm
GPR-PNL-LED-62640	622mm	622mm	11.5mm
GPR-PNL-LED-12336	1197mm	297mm	11.5mm
GPR-PNL-LED-12340	1197mm	297mm	11.5mm

References / Links

For current information see

- ▶ www.paradigmlcd.com.au

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release